

CO₂ Condensing Units

Standard Condensing units

Standard condensing units with transcritical cycle

- › Chassis in galvanized and painted steel sheet. Bodyworking and soundproofing available
- › High modular concept.
- › The gascooler can be disconnected from the unit
- › Electrical board with all the necessary electronics for the operation of the unit
- › 1 MT compressor
- › (Optional) Frequency drive
- › All piping done in stainless steel
- › Multiple options possible to facilitate transport of the unit
- › All necessary safety devices
- › 3 air exit configurations
- › Reduced dimensions
- › Easy to transport
- › Until 6 assembly options



F-Gas Free



Switchboard



Plug&Play



Electronic Control



Proportional Modulation




Heating Interchanger (Optional)




Protective Case

FNV42

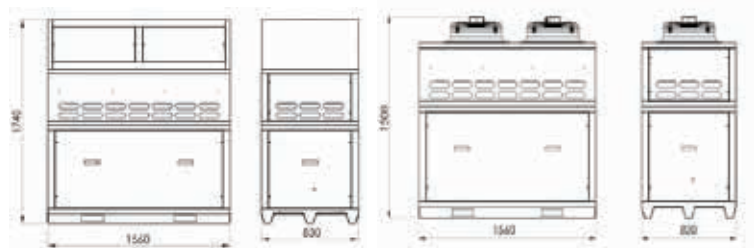

FNV58

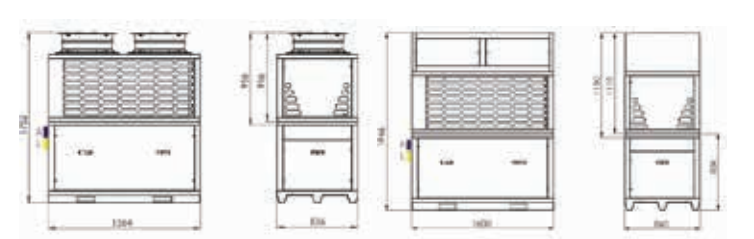

MT 1 comp.

FC17		7 kW
832 mm		9 kW

FNV42		18 kW
1,560 mm		22 kW

FNV58		38 kW
1,560 mm		45 kW

Conditions: LT: Tev.: -35°C SH: 8°K
 MT: Tev.: -10°C SH: 8°K
 Clime: Tev. med: 5°C SH: 8°K

 LT	 MT	 Clime	 Global	Mechanical subcooler	Parallel compressor	Heating interchanger	Axial	Radial
---	---	--	--	----------------------	---------------------	----------------------	-------	--------