



Wall mounted unit

FTXTP-K + RXTP-N9

BLUEEVOLUTION comfora



Guaranteed operation down to -25°C

DAIKIN



Daikin Residential Controller




Energy saving during standby mode

Wall mounted unit providing high efficiency and comfort

- › Guaranteed heating capacity down to -25°C
- › Ideal for above door installation
- › Full range A++
- › Daikin residential controller via app
- › Voice control
- › Space saving contemporary wall mounted design
- › Bluevolution range: lower environmental impact

FTXTP-K + RXTP-N9

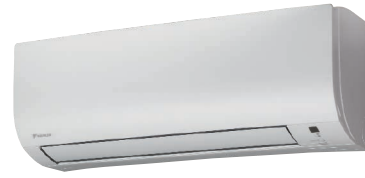

FTXTTP-K



RXTP-N9

Indoor unit		FTXTTP		25K		35K	
Dimensions	Unit	HeightxWidthxDpeth	mm	285 x770 x225			
Weight	Unit		kg	9.0			
Air filter	Type			Removable / washable			
Fan	Air flow rate	Cooling	Silent operation/Low/ Medium/High	m ³ /min	4.3 /5.3 /7.7 /10.6		4.3 /5.4 /8.2 /11.4
		Heating	Silent operation/Low/ Medium/High	m ³ /min	4.9 / 5.8 / 8.0 / 11.2		4.9 / 5.8 / 7.8 / 10.8
Sound power level	Cooling				58		
	Heating				58		
Sound pressure level	Cooling	Silent operation/Low/High			21 /26 /43		
	Heating	Silent operation/Low/High			21 /26 /43		
Control systems	Infrared remote control				ARC480A11		
	Wired remote control				BRC944B2 / BRC073A1		

See separate drawing for electrical data


Outdoor unit		RXTP		25N9		35N9	
Dimensions	Unit	HeightxWidthxDpeth	mm	551 x763 x312			
Weight	Unit		kg	38			
Sound power level	Cooling				61		
	Heating				61		
Sound pressure level	Cooling	Nom.			48		
	Heating	Nom.			49		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10 ~-46		
	Heating	Ambient	Min.~Max.	°CWB	-25 ~-18		
Refrigerant	Type				R-32		
	GWP				675		
	Charge			kg/TCO2Eq	1.1 /0.75		
Piping connections	Liquid	OD			635		
	Gas	OD			9.50		
	Piping length	OU - IU	Max.	m	20		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	15		
Power supply	Phase/Frequency/Voltage				1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)				A 16		

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data		FTXTTP + RXTP		25K + 25N9		35K + 35N9	
Cooling capacity	Min./Nom./Max.			kW 0.70 /2.50 /4.00		0.70 /3.50 /4.40	
Heating capacity	Min./Nom./Max.			kW 0.80 /3.20 /6.20		0.80 /4.00 /6.70	
Power input	Cooling	Nom.		kW 0.57		0.92	
	Heating	Nom.		kW 0.65		0.90	
Space cooling	Energy efficiency class					A++	
	Capacity	Pdesign		kW 2.50		3.50	
	SEER			7.10		7.20	
	Annual energy consumption		kWh/a	123		170	
Space heating (Average climate)	Energy efficiency class					A++	
	Capacity	Pdesign		kW 2.50		3.00	
	SCOP/A			4.98		4.81	
	Annual energy consumption		kWh/a	703		873	
Space heating (Cold climate)	Energy efficiency class					A	
	Capacity	Pdesignh		kW 3.70		4.40	
	Annual energy consumption		kWh/a	1,939		2,429	
	SCOP/C			3.95		3.80	
Nominal efficiency	EER			4.40		3.80	
	COP			4.95		4.44	
	Annual energy consumption		kWh	284		461	
	Energy labeling Directive	Cooling/Heating				A/A	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

Daikin Europe N.V. Naamloze Venootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN21-056

01/2021



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.